


Thermal Gas Mass Flow Meters for Industrial Applications



PRECISE, RELIABLE, TRUSTED
SOLUTIONS
IN GAS FLOW MEASUREMENT

- INDUSTRIAL PROCESSING PLANTS,
PULP & PAPER, STEEL, AND CHEMICAL
- OIL & GAS
- BIOGAS
- WASTEWATER



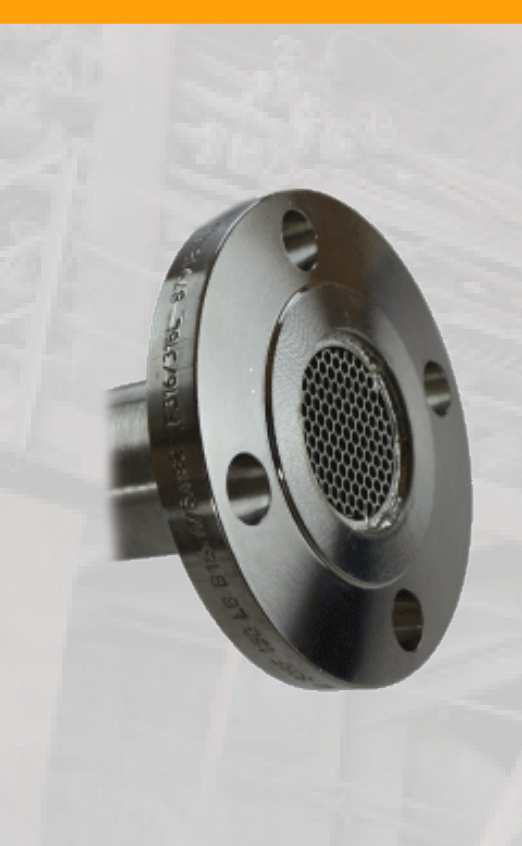

BENEFITS OF THERMAL MASS FLOW TECHNOLOGY

- Direct mass flow measurement of air and gases in standard volumetric units (e.g., SCFM or NM3/H) or mass units (e.g., LBS/M or KG/H)
- No additional pressure or temperature compensation required
- Repeatability and exceptionally broad measurement range: up to 1000:1 (100:1 typical)
- Standard linear 4-20mA output proportional to mass flow rate
- Low pressure drop
- No moving parts
- Cost-effective
- Insertion, inline, and remote* styles
- Measures flow rate and temperature

*Features and approvals vary by model number

INDUSTRIES AND APPLICATIONS

Major Industries Served

- Industrial facilities
- Oil & Gas
- Wastewater
- Environmental and emissions monitoring
- Aluminum and steel production
- Pulp & Paper facilities
- Chemical plants
- Textile plants
- Manufacturing of glass and ceramics
- Food and beverage facilities
- Automotive plants
- Pharmaceutical facilities

Industrial

- Pure and mixed gas measurement of industrial processes

Oil & Gas

- Measurement of gas to flares or combustors
- Gas measurement for gas allocation
- Gas from Vapor Recovery Units (VRU's)
- Gas from separators
- Fuel and natural gas monitoring

Wastewater Treatment Facilities

- Air flow monitoring of aeration to pools
- Natural gas flow to sludge incinerators

Environmental & Emissions Monitoring

- Natural gas monitoring for emissions calculations
- Vent or flash gas monitoring
- Flare or waste gas monitoring
- Landfill gas (LFG) monitoring





CERTIFICATIONS, ACCURACY COMPLIANCE, AND APPROVALS

Quality you can count on.

- ISO 9001:2015 certified Quality Management System
- CE Mark
- FM/FMc product certifications
- ATEX, UKEX, and IECEx certifications*
- CRN approvals*
- Welding qualifications to ASME IX
- BLM 3175 and API 14.10 accuracy compliant



AWARD-WINNING FEATURES ON FOX THERMAL PRODUCTS

The entire line of thermal gas mass flow meters from Fox Thermal have consistently won innovation and breakthrough product awards.

Compare model features below:

- 4 Innovation Awards
- 4 Breakthrough Product Awards
- 1 Product of the Year Award

THE FOX THERMAL DIFFERENCE

- Microprocessor-based, field-rangeable electronics
- DDC-Sensor™ proprietary flow sensor design*
- Gas-SelectX® field selectable gases / gas mixes*
- CAL-V™ and Zero CAL-CHECK® Calibration Validation*
- Free FT View™ Software to configure meter, print Calibration Validation certificates, run simulations, and more*
- Data Logger with 7-year history*

*not available on all models

www.foxthermal.com • 831-384-4300





MODEL FT1

The "Plug-n-Play" Flow Meter

An economical solution for a variety of industrial and wastewater applications.

- Advanced DDC Sensor™
- Gas-SelectX® technology: Pure gas menu and a 5-gas mix
- CAL-V™ Calibration Validation
- Optional Modbus RTU (RS485), BACnet MS/TP, or HART communication protocols
- Insertion and inline styles



MODEL FT2A

The Industrial Facility Favorite

Available with extensive communications options.

- DC or AC input power options
- Insertion, inline, and remote styles
- Contact input to reset total
- Optional Modbus RTU (RS485), BACnet MS/TP (RS485), Profibus-DP, DeviceNet, or Ethernet Modbus TCP communication protocols





MODEL FT3

Offshore Favorite

- Infrared (IR) buttons on display/configuration panel
- Zero CAL-CHECK® and CAL-V™ Calibration Validation tests
- Optional Modbus RTU (RS485) or HART communication protocols
- DC or AC input power options
- Insertion, inline, integral, and remote styles



Processing's
**Breakthrough
Products 2012**



MODEL FT4A

Great for Digester Applications and Much More

A precision meter for landfill gas, biogas, and flare gas measurement.

- Advanced DDC Sensor™
- Gas-SelectX® technology with 3 Menus: Pure Gas, Gas Mix, and Oil & Gas Mix
- CAL-V™ Calibration Validation
- Optional Modbus RTU (RS485) or HART communication protocols
- Insertion and inline styles





MODEL FT4X

BLM 3175 and API 14.10 Accuracy Compliant

The perfect flow meter for oil & gas applications.

- Data Logger with date/time stamp
- Advanced DDC-Sensor™
- Gas-SelectX® technology with 3 Menus: Pure Gas, Gas Mix, and Oil & Gas Mix
- CAL-V™ Calibration Validation
- Optional Modbus RTU (RS485) or HART communication protocols
- DC or AC input power options
- Insertion, inline, integral, and remote styles

FT4X Standard Data Logger with Date/Time Stamp

The advanced features of the Model FT4X Data Logger include:

- 40 daily totals (24-hour totals)
- Contract Time set to define Contract Day
- Time/date stamped alarm and event logs; 7 year history
- Power off totalizer; power failure creates event log entry

Access logs to learn about the meter's settings and functionality:

- View the meter's gas or gas mix composition
- View the meter's configuration and other meter settings
- View Calibration Validation historical test data
- View and print logs of events and alarms





STATE-OF-THE-ART TECHNOLOGY

FT View™ Software

Free, advanced downloadable software.

- PC-based software application, installed in minutes
- Configure flow meter settings
- Available for every Fox Thermal flow meter model
- Flow meter connected by USB port

Calibration Validation

Know if your flow meter is reading accurately in the field.

- Calibration Validation at the push of a button
- Eliminate the cost and inconvenience of annual factory calibration
- Test takes less than 5 minutes to run
- Produces a pass/fail result
- Certificate can be produced (using FT View software only)

DDC-Sensor™ - Direct Digitally Controlled Sensor

Innovative design for precise measurement and full-featured flow meters.

- Interfaces directly with the flow meter's microprocessor
- More control, precision, and programmability
- Robust sensor design, sensor element tubes supported at both ends
- Provides the technology platform necessary for calculating accurate gas correlations


Note: Calibration Validation and DDC-Sensor™ available on limited models





GAS-SELECTX®

Create a custom gas mix for your Fox Thermal flow meter

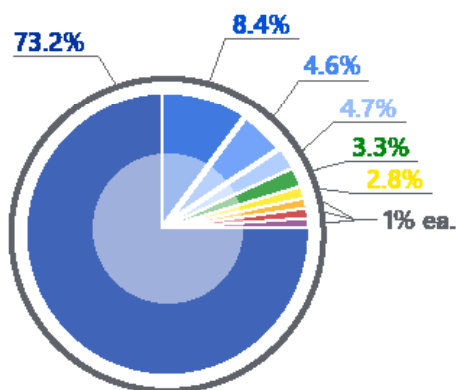

- Methane
- Ethane
- Propane
- Nitrogen
- Hexanes
- n-Butanes
- i-Butanes
- Pentanes
- CO2

STATE-OF-THE-ART TECHNOLOGY (CONT'D)

Gas-SelectX® Gas Selection Menu - Models FT1, FT4A, and FT4X

- Allows the user to choose from gas menus
- Switch gases or gas mixes in the field
- No need to return the flow meter to the factory for recalibration
- Three gas menus:
 - Pure gas menu
 - Mixed gas menu
 - Oil & gas menu*

The 3 menus of Gas-SelectX®

Pure Gas Menu	Mixed Gas Menu	O&G Gas Menu*
Air	Air	Methane (C1)
Argon	Argon	Ethane (C2)
Butane	Butane	Propane (C3)
Carbon Dioxide	Carbon Dioxide	i-Butane (C4)
Ethane	Ethane	n-Butane (C4)
Ethylene*	Ethylene*	Pentanes (C5)
Helium	Helium	Hexanes (C6)
Hydrogen	Hydrogen	Heptanes (C7)
Methane	Methane	Octanes (C8)
Natural Gas**	Nitrogen	Nonanes+(C9)+
Nitrogen	Oxygen	Carbon Dioxide
Oxygen	Propane	Ethylene
Propane	Propylene*	Nitrogen
Propylene*		Propylene

*Not available on model FT1

**Choosing *Natural Gas* sets the NAESB average in a pre-programmed mix of methane, ethane, propane, nitrogen, and carbon dioxide. Natural gas composition can be reprogrammed by user with custom percentages if necessary.