


VF3 Compression

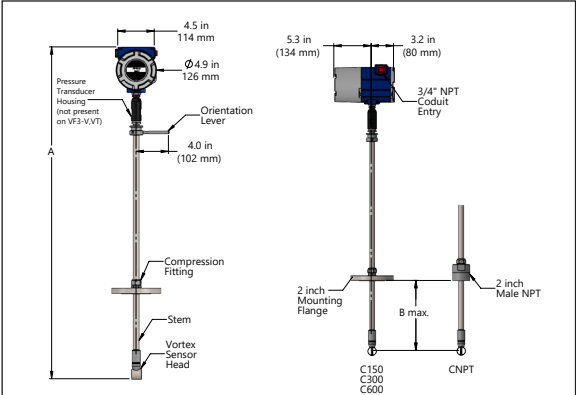

VF3 Insertion Meter Weight			
Connection Size	CL	SL	EL
CNPT / Compression / 2-in Male NPT	13 (5.7)	14.0 (6.2)	15.0 (6.7)
C150 / Compression / 150 lb. Flange	15 (6.8)	16.0 (7.3)	17.0 (7.8)
C300 / Compression / 300 lb. Flange	17 (7.8)	18.0 (8.3)	19.0 (8.8)
C600 / Compression / 600 lb. Flange	18 (8.2)	19.0 (8.7)	20.0 (9.2)
C900 / Compression / 900 lb. Flange	31.0 (14.1)	32.0 (14.5)	33.0 (15.0)
C16 / Compression / DN50 PN16 Flange	15 (6.8)	16.0 (7.3)	17.0 (7.8)
C40 / Compression / DN50 PN40 Flange	17 (7.8)	18.0 (8.3)	19.0 (8.8)
C63 / Compression / DN50 PN63 Flange	18 (8.2)	19.0 (8.7)	20.0 (9.2)

Add 11lb (5kg) for remote electronics.

VF3 Insertion Meter Sizes - V, VT, VTEP, VETEP						
Model Code / Probe Seal / Process Connection	Compact Probe		Standard Probe		Extended Probe	
	A	B	A	B	A	B
CNPT / Compression / 2-in Male NPT	21.6 (549)	9.8 (249)	38.0 (965)	26.2 (665)	50.0 (1270)	38.2 (970)
C150 / Compression / 150 lb. Flange	21.6 (549)	10.9 (277)	38.0 (965)	27.3 (693)	50.0 (1270)	39.3 (998)
C300 / Compression / 300 lb. Flange	21.6 (549)	10.8 (274)	38.0 (965)	27.2 (691)	50.0 (1270)	39.2 (996)
C600 / Compression / 600 lb. Flange	21.6 (549)	10.4 (264)	38.0 (965)	26.8 (681)	50.0 (1270)	38.8 (986)
C900 / Compression / 900 lb. Flange	21.6 (549)	9.9 (251)	38.0 (965)	26.3 (668)	50.0 (1270)	38.3 (973)
C16 / Compression / DN50 PN16 Flange	21.6 (549)	10.9 (277)	38.0 (965)	27.3 (693)	50.0 (1270)	39.3 (998)
C40 / Compression / DN50 PN40 Flange	21.6 (549)	10.8 (274)	38.0 (965)	27.2 (691)	50.0 (1270)	39.2 (996)
C63 / Compression / DN50 PN63 Flange	21.6 (549)	10.4 (264)	38.0 (965)	26.8 (681)	50.0 (1270)	38.8 (986)

VF3 Insertion Meter Sizes - VTP						
Model Code / Probe Seal / Process Connection	Compact Probe		Standard Probe		Extended Probe	
	A	B	A	B	A	B
CNPT / Compression / 2-in Male NPT	24.6 (625)	9.8 (249)	41.0 (1041)	26.2 (665)	53.0 (1346)	38.2 (970)
C150 / Compression / 150 lb. Flange	24.6 (625)	10.9 (277)	41.0 (1041)	27.3 (693)	53.0 (1346)	39.3 (998)
C300 / Compression / 300 lb. Flange	24.6 (625)	10.8 (274)	41.0 (1041)	27.2 (691)	53.0 (1346)	39.2 (996)
C600 / Compression / 600 lb. Flange	24.6 (625)	10.4 (264)	41.0 (1041)	26.8 (681)	53.0 (1346)	38.8 (986)
C900 / Compression / 900 lb. Flange	24.6 (625)	9.9 (251)	41.0 (1041)	26.3 (668)	53.0 (1348)	38.3 (973)
C16 / Compression / DN50 PN16 Flange	24.6 (625)	10.9 (277)	41.0 (1041)	27.3 (693)	53.0 (1348)	39.3 (998)
C40 / Compression / DN50 PN40 Flange	24.6 (625)	10.8 (274)	41.0 (1041)	27.2 (691)	53.0 (1348)	39.2 (996)
C63 / Compression / DN50 PN63 Flange	24.6 (625)	10.4 (264)	41.0 (1041)	26.8 (681)	53.0 (1348)	38.8 (986)