


VF4 Inline Flanged

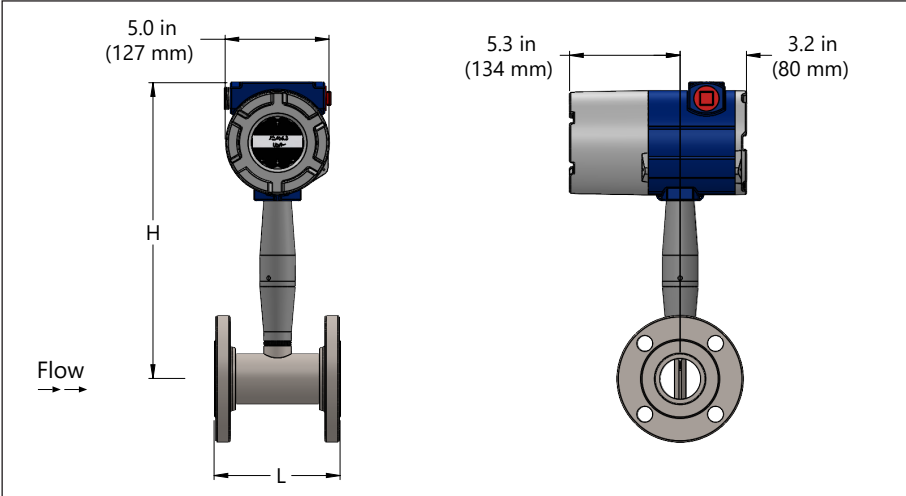

VF4 Inline Sizes and Weight							
Flow Meter Nominal Size	Sizes			Weight			
	L	L (ANSI 900)	H	ANSI 150 (PN 16)	ANSI 300 (PN 40)	ANSI 600 (PN 63)	ANSI 900 (PN 160)
1/2 inch (15 mm)	7.9 in (200 mm)	7.9 in (201 mm)	13.5 in (343 mm)	12.0 lb (5.5 kg)	12.5 lb (5.7 kg)	13.4 lb (6.1 kg)	17.6 lb (8 kg)
3/4 inch (20 mm)	7.9 in (200 mm)	9.7 in (247 mm)	13.5 in (343 mm)	13.0 lb (5.9 kg)	14.6 lb (6.6 kg)	15.6 lb (7.1 kg)	21.0 lb (9.5 kg)
1 inch (25 mm)	7.9 in (200 mm)	10.8 in (274 mm)	13.5 in (343 mm)	13.5 lb (6.1 kg)	16.3 lb (7.4 kg)	16.4 lb (7.5 kg)	26.3 lb (11.9 kg)
1.5 inch (40 mm)	7.9 in (200 mm)	12.0 in (305 mm)	13.8 in (351 mm)	16.3 lb (7.4 kg)	23.3 lb (10.6 kg)	24.6 lb (11.2 kg)	37.2 lb (16.9 kg)
2 inch (50 mm)	7.9 in (200 mm)	14.1 in (357 mm)	14.0 in (356 mm)	21.2 lb (9.6 kg)	26.8 lb (12.2 kg)	33.2 lb (15.1 kg)	60.5 lb (27.4 kg)
3 inch (80 mm)	7.9 in (200 mm)	14.8 in (375 mm)	14.6 in (371 mm)	33.0 lb (15.0 kg)	41.0 lb (18.6 kg)	56.1 lb (25.5 kg)	76.5 lb (34.7 kg)
4 inch (100 mm)	9.84 in (250 mm)	16.9 in (429 mm)	15.1 in (384 mm)	45.8 lb (20.8 kg)	66.8 lb (30.3 kg)	96.0 lb (43.6 kg)	121.2 lb (55.0 kg)
6 inch (150 mm)	11.81 in (300 mm)	19.5 in (495 mm)	16.2 in (411 mm)	68.3 lb (31.0 kg)	106.3 lb (48.2 kg)	194.3 lb (88.2 kg)	254.4 lb (115.4 kg)
8 inch (200 mm)	11.81 in (300 mm)	22.8 in (579 mm)	17.2 in (437 mm)	112.4 lb (51.0 kg)	168.4 lb (76.5 kg)	299.0 lb (136.0 kg)	433.0 lb (196.4 kg)
10 inch (250 mm)	15.0 in (381 mm)	29.0 in (737 mm)	18.2 in (462 mm)	188.3 lb (85.5 kg)	262.3 lb (119.1 kg)	462.3 lb (209.9 kg)	665.9 lb (302.0 kg)
12 inch (300 mm)	17.7 in (450 mm)	30.3 in (770 mm)	19.2 in (488 mm)	298.6 lb (135.6 kg)	402.6 lb (182.8 kg)	606.6 lb (275.4 kg)	926.6 lb (420.3 kg)

Add 11lb (5kg) for remote electronics.